




FRONT REACTION TORQUE WRENCH SERIES (SHINE)

- Compact design & Unibody housing.
- Designed with high strength & low weight.
- Torque ranging from 243 to 24,132 Nm with accuracy $\pm 3\%$.
- Anti-lock torque release lever.
- 360/180° adjustable Uni-swivel assembly for twin line hose joint.
- Fitted with High pressure hose coupling system.
- 1 year warranty.

HYDRAULIC TORQUE WRENCHES

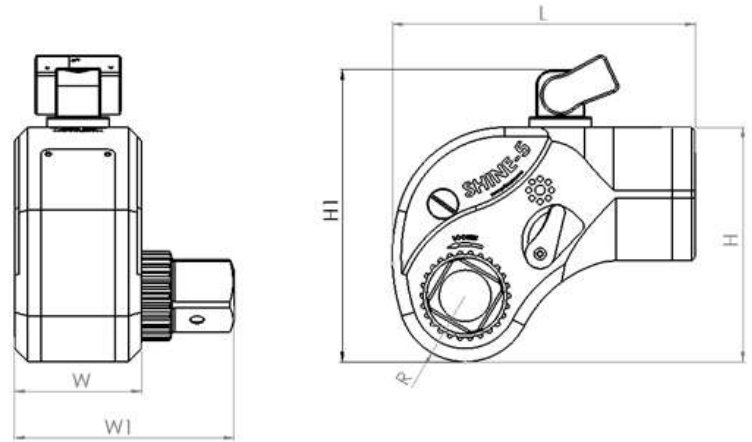

MODEL	SQUARE DRIVE	DIMENSIONS (mm)						WEIGHT (kg)	TORQUE			
									Ft. lbs.		Nm	
		L	W	W1	H	H1	R		Min	Max	Min	Max
SHINE-1	3/4"	135	56	93	103	134	28	2.15	180	1252	243	1698
SHINE-3	1"	173	72	116	130	170	38	4.65	450	3026	609	4103
SHINE-5	1 1/2"	205	86	148.5	160	199	45	7.65	755	5319	1024	7212
SHINE-10	1 1/2"	259.5	110	178.5	206	252.5	58	13.8	1777	11722	2409	15893
SHINE-20	2 1/2"	300	127	223	238	285	67	22.25	2741	17799	3716	24132